



## CE SERIES FILTERS & MOISTURE SEPARATOR



# AIR TREATMENT

## HIGH EFFICIENCY FILTRATION FOR CLEAN AND TECHNICALLY OIL-FREE COMPRESSED AIR

Compressed air is a powerful and versatile energy source. Compressed air also contains contaminants from the surrounding atmosphere and from the compression process. It is estimated that an average of 140 million dirt particles are found in a cubic metre of air.

80 percent of these contaminants are so small they will pass through your compressor's intake filter and find their way to process line to either cause frequent expensive downtimes of your pneumatic equipment or adversely affect the quality of your end products.

This is why it makes sense to incorporate compressed air treatment into your compressed air system.

### CE-SERIES FILTERS

Filter Model	Conn Size	Cap. At 7 Bar g			Max Oper. Pressure (bar)	Approx. Weight (kg)	Dimensions				Replace-ment Element
		(m3/min)	(cfm)	(litres/sec)			A	B	C	D	
CE025	1/2"	1.49	53	25.00	16.00	1.20	91	189	26.5	100	ECE025
CE041	3/4"	2.49	88	41.53	16.00	1.60	91	262	26.5	169	ECE041
CE062	1"	3.73	132	62.30	16.00	3.80	139	252	40	123	ECE062
CE112	1-1/4"	6.73	237	111.85	16.00	4.20	139	355	40	233	ECE112
CE177	1-1/2"	10.62	375	176.98	16.00	4.60	139	457	40	326	ECE177
CE233	1-1/2"	13.99	494	233.14	16.00	6.40	190	652	40	521	ECE233
CE343	2"	20.60	727	343.10	16.00	14.20	190	480	56.5	377	ECE343
CE514	2-1/2"	30.87	1099	518.67	16.00	16.40	190	660	56.5	541	ECE514

### FILTER GRADES

Filter Grade	Particle Removal Down To	Oil Removal Down To	Nominal Initial Pressure Drop
P	3 micron	-	0.03bar g
U	1 micron	0.1mg/m3	0.05bar g
H	0.01 micron	0.01mg/m3	0.09bar g
C	-	0.003mg/m3	0.10bar g

### General Information

Maximum recommended operating temperature = 80°C

Minimum recommended operating temperature = 1°C

Maximum recommended pressure differential for element change is 0.6bar (except Grade C)

Material of housing is Aluminium

Filters come complete with autodrain.

### CAPACITY CORRECTION FACTOR FOR VARIOUS OPERATING PRESSURE

Pressure	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Factor	0.25	0.38	0.5	0.65	0.75	0.88	1.00	1.13	1.25	1.38	1.50	1.63	1.75	1.50	2.00	2.13



### ACCESSORIES

- Filter / Moisture Separator Mounting kits
- Connection Kit for Filter / Moisture Separators
- Optional differential gauge with voltage free alarm contact
- Please contact CAPS for further information on other options



# WATER SEPARATORS

## CENTRIFUGAL SEPARATION TO REMOVE UP TO 99% OF WATER AEROSOL IN COMPRESSED AIR

Compressed air is normally saturated with moisture in the form of water vapour as well as aerosol, and this needs to be removed to prevent problems further downstream at the point of application.

Conquest's water separator is specially designed based on the proven centrifugal separation to remove up to 99% of the water aerosol in compressed air. Working in conjunction with other compressed air treatment products like filters, after-coolers and dryers, the water separator is a very cost effective way of further enhancing their efficiency by ensuring that bulk water generated in the compressed air is properly separated and discharged from the system.

### Features & Advantages

- Removes up to 99% bulk water.
- Very low maintenance cost.
- Simple and easy to install.
- Efficient automatic drain.
- Robust aluminium housing.



### CECS-SERIES WATER SEPARATORS

Water Separator Model	Conn Size	Cap. At 7 Bar g			Max Oper. Pressure (bar)	Approx. Weight (kg)	Dimensions			
		(m3/min)	(cfm)	(litres/sec)			A	B	C	D
CECS012	1/4"	0.60	21	9.91	16.00	0.98	91	170	26.5	66
CECS018	3/8"	1.25	44	20.83	16.00	0.98	91	189	26.5	82
CECS025	1/2"	2.84	100	47.33	16.00	0.98	91	189	26.5	100
CECS041	3/4"	4.52	159	75.33	16.00	1.10	91	262	26.5	169
CECS062	1"	7.02	247	117	16.00	3.46	139	252	40	123
CECS112	1-1/4"	11.02	389	183.67	16.00	3.73	139	355	40	233
CECS177	1-1/2"	18.50	653	308.33	16.00	4.30	139	457	40	326
CECS343	2"	21.08	744	351.13	16.00	10.70	190	652	40	521
CECS343-65	2-1/2"	35.58	1249	589.46	16.00	14.20	190	480	56.5	377

### CAPACITY CORRECTION FACTOR FOR VARIOUS OPERATING PRESSURE

Pressure	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Factor	0.25	0.38	0.5	0.65	0.75	0.88	1.00	1.13	1.25	1.38	1.50	1.63	1.75	1.50	2.00	2.13


### General Information

Maximum recommended operating temperature = 80°C

Minimum recommended operating temperature = 1°C

Nominal differential pressure of 0.03barg

Filters come completed with autodrain and differential gauge

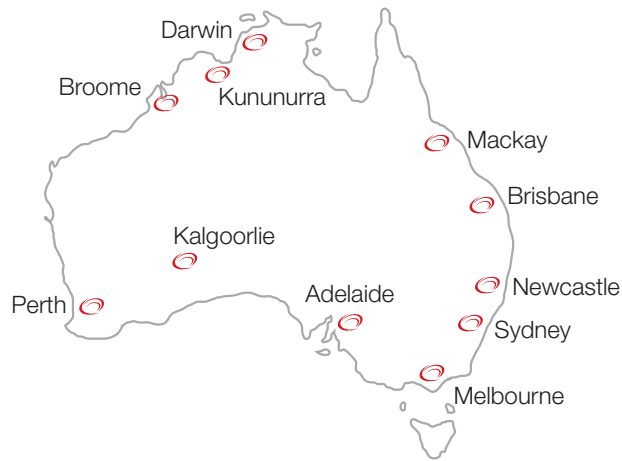

## NEW SOUTH WALES

### SYDNEY

68 Long Street  
Smithfield NSW 2164  
Tel: (02) 9725 1577  
Fax: (02) 9725 2802

### NEWCASTLE

133 Tomago Road  
Tomago NSW 2322  
Tel: (02) 4964 0000  
Fax: (02) 4964 9653

## VICTORIA

### MELBOURNE

18-20 Stamford Road  
Oakleigh VIC 3166  
Tel: (03) 8527 6800  
Fax: (03) 8527 6822

## WESTERN AUSTRALIA

### PERTH

185 Planet Street  
Welshpool WA 6106  
Tel: (08) 6250 9800  
Fax: (08) 6250 9850

### KALGOORLIE

1/2 Clements Way  
Boulder WA 6432  
Tel: (08) 9093 1488  
Fax: (08) 9093 1901

### BROOME

6 Ord Way  
Broome WA 6725  
Tel: (08) 9192 3777  
Fax: (08) 9192 6333

### KUNUNURRA

37 Bandicoot Drive  
Kununurra WA 6743  
Tel: (08) 9168 2914  
Fax: (08) 9168 3091

## NORTHERN TERRITORY

### DARWIN

19 Toupein Road  
Palmerston NT 0830  
Tel: (08) 8932 1577  
Fax: (08) 8932 7775

## QUEENSLAND

### BRISBANE

62 Westgate Street  
Wacol QLD 4076  
Tel: (07) 3879 3409  
Fax: (07) 3879 3443

### MACKAY

11-13 Titanium Drive  
Paget QLD 4740  
Tel: (07) 4952 6996  
Fax: (07) 4998 5395

## SOUTH AUSTRALIA

### ADELAIDE

1 Streiff Road  
Wingfield SA 5013  
Tel: (08) 8262 6666  
Fax: (08) 8162 9253



**SALES:** 1800 800 878

**SERVICE & HIRE:** 1800 802 697

**EMAIL:** [info@capsaust.com.au](mailto:info@capsaust.com.au)

[www.capsaustralia.com.au](http://www.capsaustralia.com.au)